

ITEMS REQUIRED BY INSTALLER

- Minimum 3/4" length 18 gauge brad nails
- Brad nail gun


ITEMS PROVIDED BY KOLBE

- Glazing bead - 4 pcs per sash/panel*

* The glazing bead on your unit may vary from the profile shown in these instructions

GLAZING BEAD APPLICATION

- The glazing bead is cut to size at the factory.
- Brad nails should be spaced 1" from ends and every 6-8" on center thereafter at a maximum 25° angle.

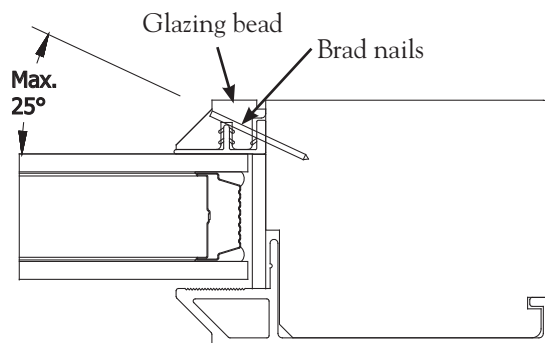

Bead installation is the same for all product types. Ultra sash shown for simplicity.

5162500