

#### ITEMS REQUIRED BY INSTALLER

- Minimum 3/4" length 18 gauge brad nails
- Brad nail gun



#### ITEMS PROVIDED BY KOLBE

- Glazing bead - 4 pcs per sash/panel\*

\* The glazing bead on your unit may vary from the profile shown in these instructions

#### GLAZING BEAD APPLICATION

- The glazing bead is cut to size at the factory.
- Attach the glazing beads with 18 GA x 3/4" brad nails, placing them 1" from each end and spaced 6-8" apart on center thereafter, ensuring a maximum angle of 25°.

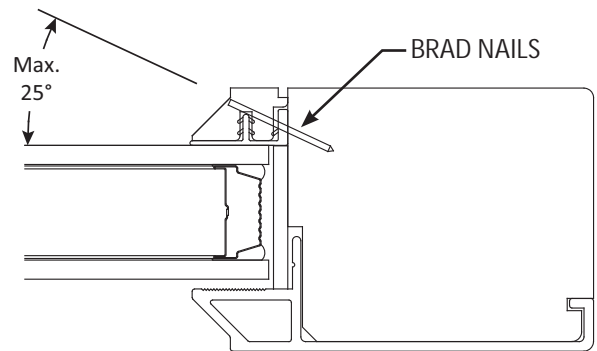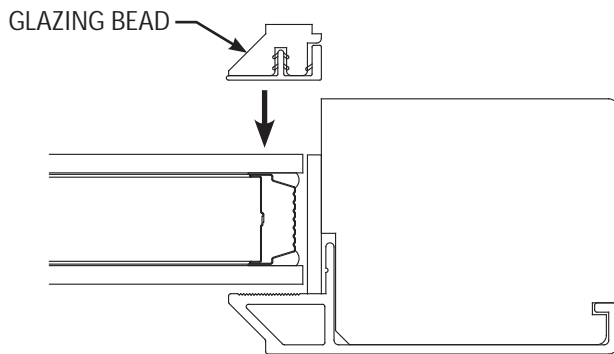

Bead installation is the same for all product types. Ultra sash shown for simplicity.

5162500